


EC508T R (Tight Radius)



MODUTECH

| | |
|--------------------|------------------------------------------------------------------------------|
| Pitch : | 50,8 mm / 2 inch |
| Belt Surface : | Open, Smooth Surface |
| Minimum Width : | 508 mm / 20 inch |
| Open Area (%) : | 58%. (Biggest opening 15 x 17 mm) |
| Contact Area (%) : | 85%. Open Contact Area |
| Flight : | No |
| Divider : | Yes (h=25 mm) |
| Rod : | Ø6 mm / 0.236 inch - Self Lock |
| Approved : | FDA and EU |
| Curve : | Yes |
| Color : | Additional colors available |
| Cleanability : | Excellent |
| Application : | Straight and side flexing |
| Collapse Factor : | 1.5 - 1.7 (Please check page 185 to see Collapse Factors-Width Table) |
| Belt Thickness: | 16 mm / 0.630 inch |

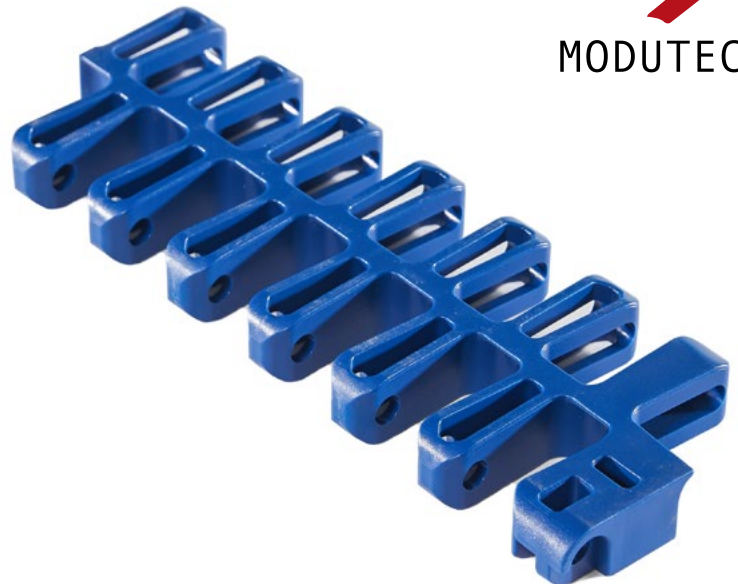

Product Features and Functional Benefits

- Belt designed for tight radius applications.
- Available for medium and high load capacity.
- Stainless steel pins option for high temperature applications.
- Stainless steel pins option reduce belt elongation for high temperature application.
- High temperature and wear resistance. Unique locking system.
- Belt provides optimal open area for drainage and airflow.
- Suitable for proofer-cooling-freezing spiral towers.

Available Moulded Module Sizes

- 203,2 mm / **4 inch** module
- 184 mm / **7.24 inch** module
- 172 mm / **6.76 inch** module


EC508T R / Technical Information

| BELT MATERIAL | BELT STRENGTH | | | | TEMPERATURE | | BELT WEIGHT |
|---------------|---------------|-------------|-------|------------|-----------------------|-----------------------|----------------------------------------|
| | Straight | | Curve | | °C (min.) - °F (min.) | °C (max.) - °F (max.) | Kg/m ² - lb/ft ² |
| | N/m | lb/ft | N/m | lb/ft | | | |
| Polypropylene | 16500 | 1131 | 2560 | 568 | +5 / +42.8 | +90 / +194 | 5,2 - 1.07 |
| Polyethylene | - | - | - | - | - | - | - |
| Acetal | 23100 | 1583 | 3520 | 792 | -43 / -45.4 | +110 / +230 | 7,5 - 1.54 |

EC508T R / Standard Belt Widths


- Belt strength and temperature values are maximum on the table.

| BELT SERIES | WIDTH (W) | | | | Belt With Tolerance (max.) |
|----------------|-----------|------|--------|------|----------------------------------|
| | PP | | POM | | |
| | mm | inch | mm | inch | |
| EC508T R | 508,0 | 20.0 | 508,0 | 20.0 | ± 0,5 mm |
| EC508T R | 558,8 | 22.0 | 558,8 | 22.0 | ± 2 mm |
| EC508T R | 609,6 | 24.0 | 609,6 | 24.0 | ± 2 mm |
| EC508T R | 660,4 | 26.0 | 660,4 | 26.0 | ± 3 mm |
| EC508T R | 711,2 | 28.0 | 711,2 | 28.0 | ± 3 mm |
| EC508T R | 762,0 | 30.0 | 762,0 | 30.0 | ± 3 mm |
| EC508T R | 812,8 | 32.0 | 812,8 | 32.0 | ± 3 mm |
| EC508T R | 863,6 | 34.0 | 863,6 | 34.0 | ± 4 mm |
| EC508T R | 914,4 | 36.0 | 914,4 | 36.0 | ± 4 mm |
| EC508T R | 965,2 | 38.0 | 965,2 | 38.0 | ± 4 mm |
| EC508T R | 1016,0 | 40.0 | 1016,0 | 40.0 | ± 4 mm |
| EC508T R | 1066,8 | 42.0 | 1066,8 | 42.0 | ± 4 mm |
| EC508T R | 1117,6 | 44.0 | 1117,6 | 44.0 | ± 4 mm |
| EC508T R | 1168,4 | 46.0 | 1168,4 | 46.0 | ± 4 mm |

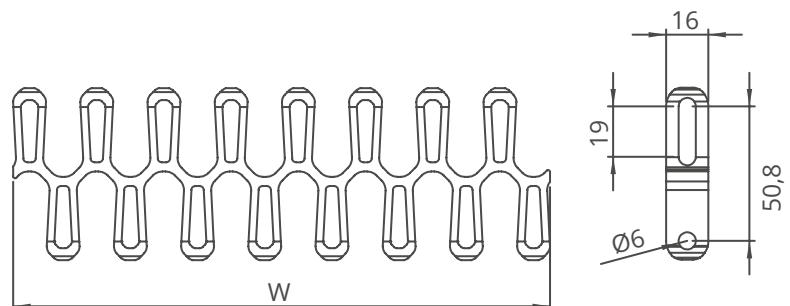

- Standard belt increments 50,8 mm.
- Non-standard increments 25,4 mm
- Please contact with customer service for precise belt measurements.
- For smaller and bigger sizes, please contact with customer service.




EC508T R Serie *Sprockets and Accessories*

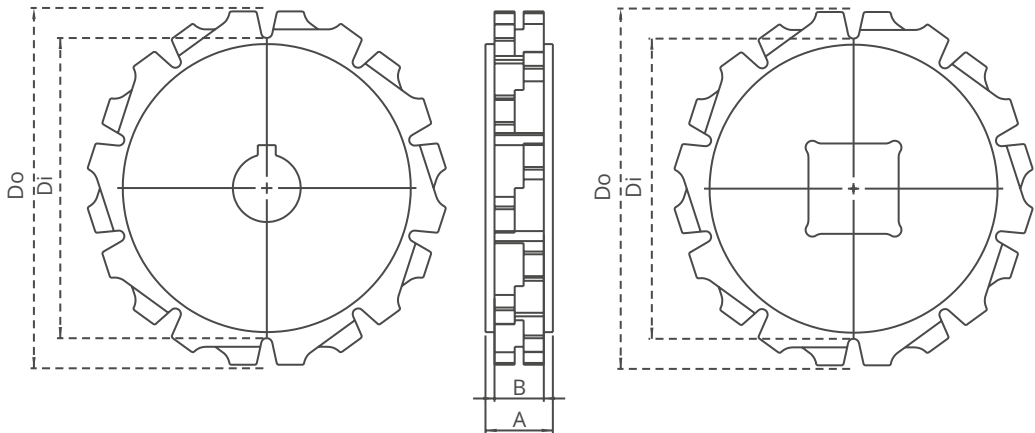

EC508T R Serie / Machined Sprocket Dimensions

| NO.TEETH | Di mm/inch | Do mm/inch | B mm/inch | A mm/inch | Square Bore (Q) mm/inch | Round Bore (R) mm/inch | PRODUCT CODE | |
|----------|---------------------|---------------------|------------------|------------------|-------------------------------|------------------------------|------------------|------------------|
| | | | | | | | Square Type (Q) | Round Type (R) |
| Z8 | 99,7 / 3.93 | 127,3 / 5.01 | 22 / 0.87 | 30 / 1.18 | 40 / 1.5 | 25-30 / 1-1.25 | EC508TRSQZ8*POM | EC508TRSRZ8*POM |
| Z10 | 133,6 / 5.26 | 160,4 / 6.31 | 22 / 0.87 | 30 / 1.18 | 40 / 1.5 | 25-30 / 1-1.25 | EC508TRSQZ10*POM | EC508TRSRZ10*POM |
| Z12 | 167,1 / 6.58 | 193,2 / 7.61 | 22 / 0.87 | 30 / 1.18 | 40 / 1.5 | 25-30 / 1-1.25 | EC508TRSQZ12*POM | EC508TRSRZ12*POM |

*All required sprockets produced by CNC.
*Other sprockets and hub sizes are manufactured up to request.
*POM (Acetal) and PA (Polyamide) sprockets raw material is available on request.
***Machined Split Sprockets are available for each size.**

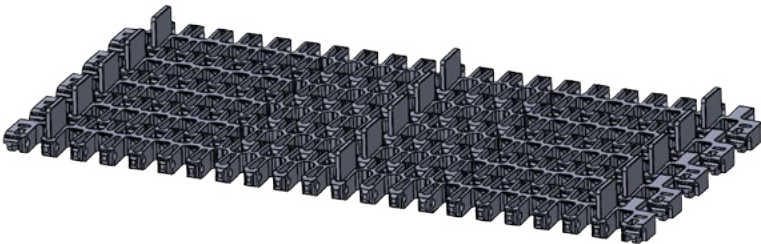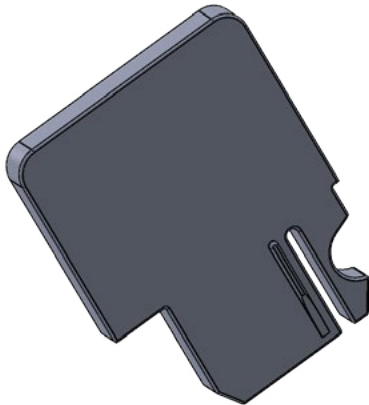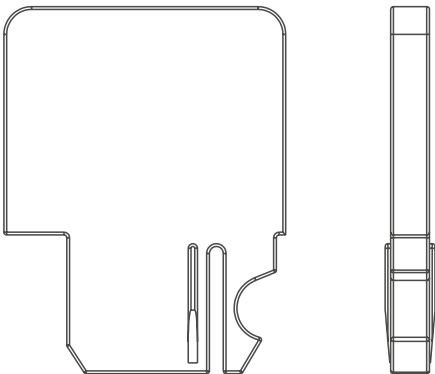


EC508T R Serie / Divider Technical Specifications

| Divider | - | |
|----------|-------|-------------|
| | mm | inch |
| Standard | 35,9 | 1.41 |
| Standard | 61,3 | 2.41 |
| Standard | 86,7 | 3.41 |
| Standard | 112,1 | 4.41 |


EC508T R Serie / Drum Types

Central Driver Drum

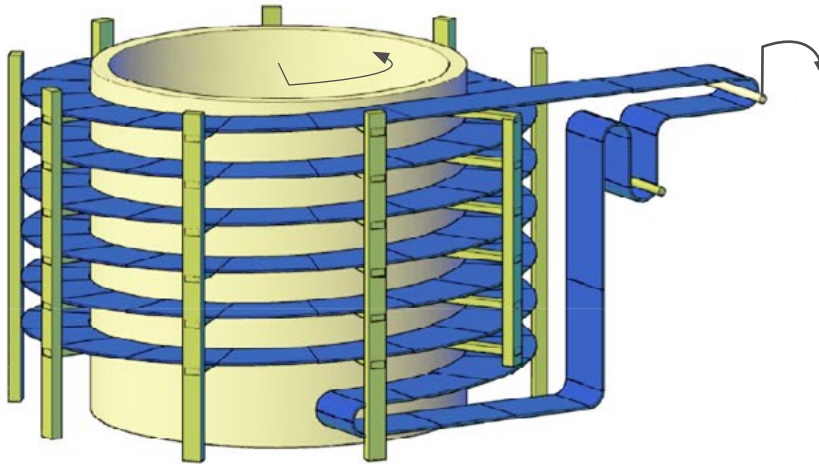

Spiral conveyor of this kind is made of modular belt that twisted around of special drum structure in the center. The belt is sliding on rails with plastic profile with low friction. The rails are fixed on external vertical support columns. The drive drum has a cylindrical shape and made of profiled pipes or plates, forming a continuous or rarefied surface.

Lateral Driver Drum

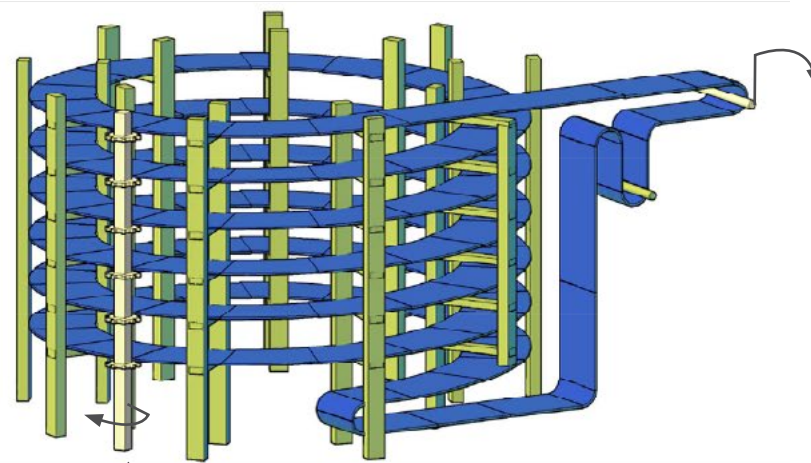

Lateral drive system has been implemented as a stainless steel structure with a gear motor located in a bottom part and connected with a vertical shaft that has driving sprockets, the number of which equals the number of tiers on the spiral conveyor. Belt received the teeth on the outer contour and through which carried out the movement from the sprockets, thus forming a multilevel gear transmission.


Drive Shaft

Wear Strip Placement Calculation

This formula is a general guideline and does not take into consideration belts traveling at speeds greater than 75 ft/min. (23 m/minute). For high speed applications, Modutech recommends increasing the height of "A" and shortening the wear strips as much as one belt pitch in length.

$$A = \frac{1}{2} \times (D_p - BT)$$

A = Calculated Height
 D_p = Sprocket Pitch Diameter
 BT = Belt Thickness

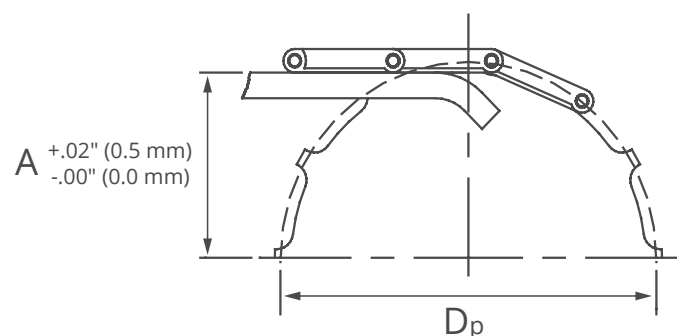

EC508T R Serie *Technical Specifications*



EC508T R Serie / Wear Strip Placement

Due to the strength and rigidity of the stainless steel pins the number of wear strip can be largely reduced compared to other belts with plastic pin.


The wear strip distance is based on the product weight and how is distributed on the belt, a range between 250 and 400 mm is covering most of the case. on the return path the guides can be spaced up 1 meter apart.

Due to excellent belt width tolerance the lateral gap between belt and guides can be few mm, anyhow it is important to keep into firm consideration the thermal dilatation of the belt that corresponds exactly to the dilatation of the stainless steel pin.


Note: Please contact with your sales representative for suitable wear strip types and location for spiral towers.

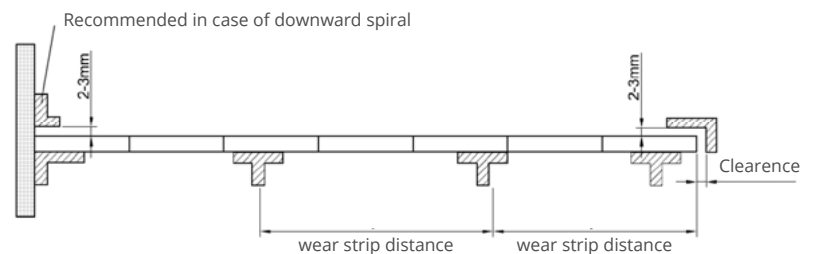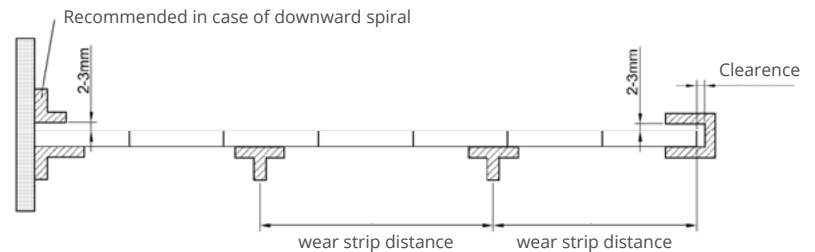

EC508T R Serie / Support

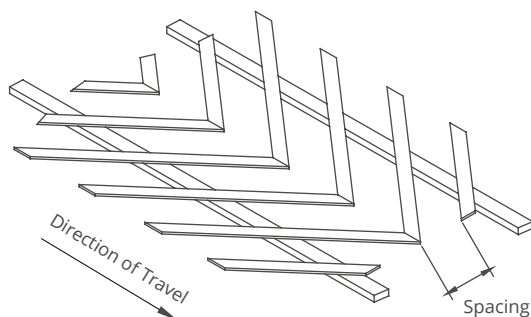


Herringbone rails: Modutech recommended. Flat wear strips in a "V" configuration with the point of the "V" pointing in the direction of travel. Low friction wear strip material preferred to minimize belt wear. Recommended spacing between rails of 100–300mm depending on belt type, load, and other factors. This configuration distributes the wear over the entire belt width.

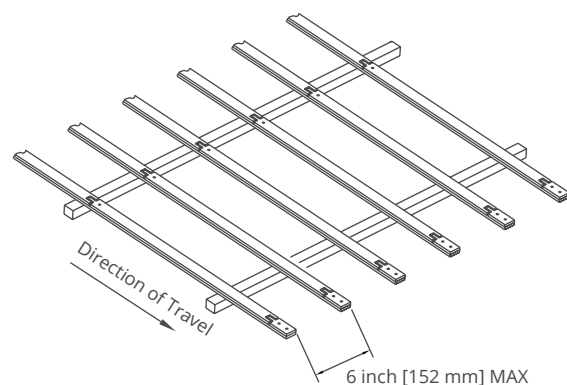

Longitudinal Rails: Flat wear strips the full length of the conveyor, parallel to each other and perpendicular to the terminal shafts. Low friction wear strip material preferred to minimize belt wear. Recommended spacing between rails of 100-300mm depending on belt type, load, and other factors. This configuration does not distribute wear over the full width of the belt.




EC508T R Serie *Engineering Information*

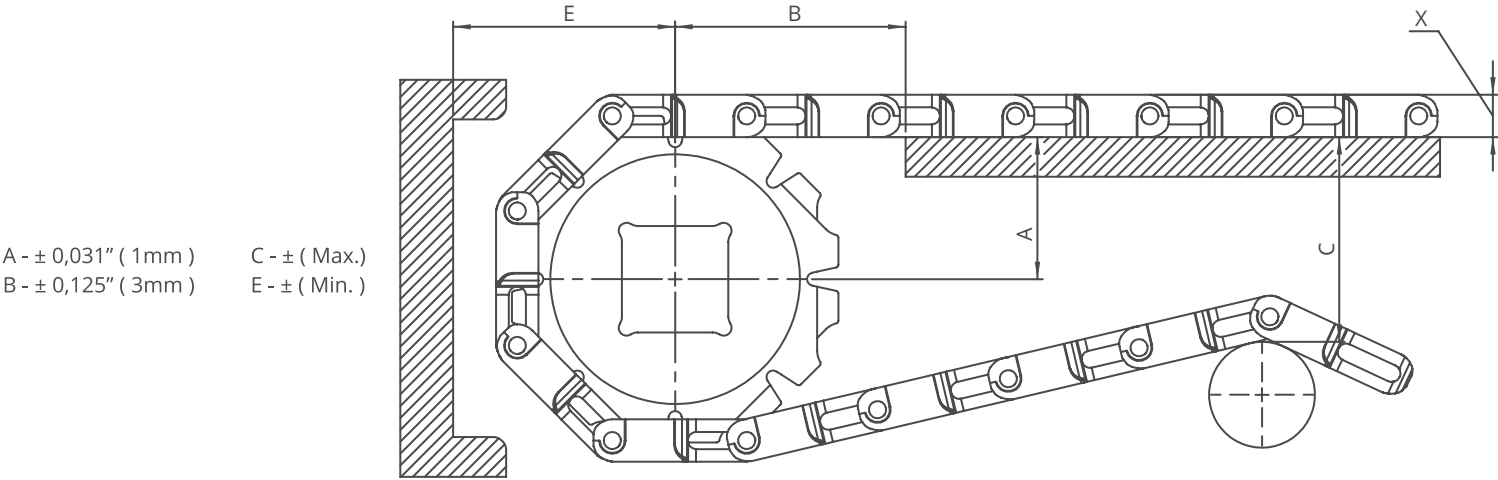

EC508T R Serie / Conveyor Frame Dimensions

| Sprockets Description | | | A | | B | | C | | E | | X | |
|-----------------------|-------|----------|-----------------------|------|------|------|------|-------|------|-------|------|------|
| Pitch Diameter | | No.Teeth | Range (Bottom to Top) | | inch | mm | inch | mm | inch | mm | inch | mm |
| inch | mm | | inch | mm | | | | | | | | |
| EC508T R | | | | | | | | | | | | |
| 4.52 | 114,8 | 8 | 2.36 | 60,1 | 1.85 | 47,0 | 4.47 | 113,5 | 3.36 | 85,4 | 0.63 | 16,0 |
| 5.81 | 147,5 | 10 | 2.96 | 75,1 | 2.31 | 58,7 | 5.85 | 141,8 | 4.01 | 101,8 | 0.63 | 16,0 |
| 7.09 | 180,2 | 12 | 3.55 | 90,1 | 2.77 | 70,5 | 6.70 | 170,2 | 4.65 | 118,1 | 0.63 | 16,0 |

Radius Belt Example 90° S-Curve

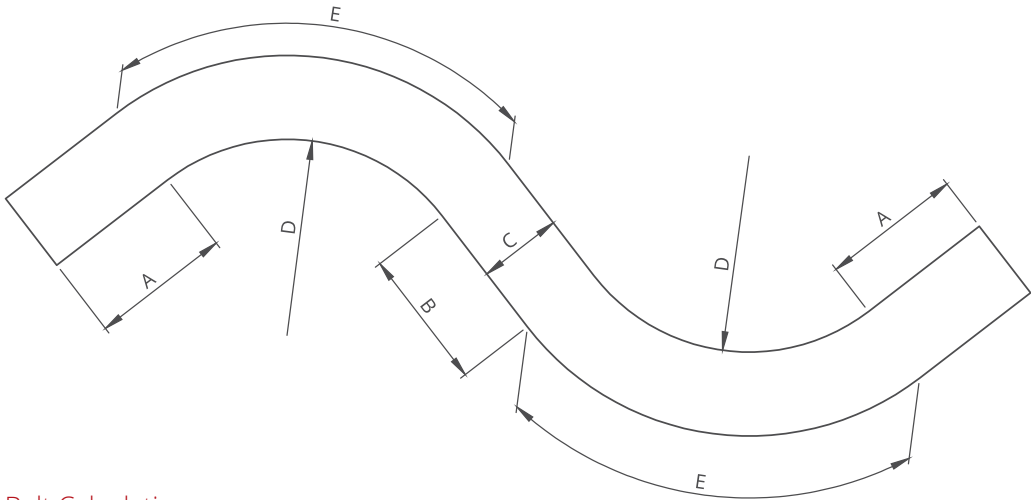

EC508T R Serie / Radius Belt Calculation

- A: Straight run pull and n = Belt width
B: Straight run between 2 curves = min. 2 x belt width
C: Belt width
D: Minimum inner radius
E: Curve length

Collapse Factor = $\frac{\text{Min. inner radius}}{\text{Belt width}}$

Minimum inner radius = Collapse Factor x Belt width

CALCULATION EXAMPLE

Belt width: 762 mm Radius Belt
Collapse Factor: 1.53


D: 762 mm x 1.53 = 1166 mm
A: 762 mm
B: 2 x 762 mm = 1524 mm (min.)
E: $\frac{2 \times (C+D) \times 3.14}{4} = 3027 \text{ mm}$

Total length = (2 x A) + B + (2 x E)



MODUTECH

EC508T R Serie *Engineering Information*

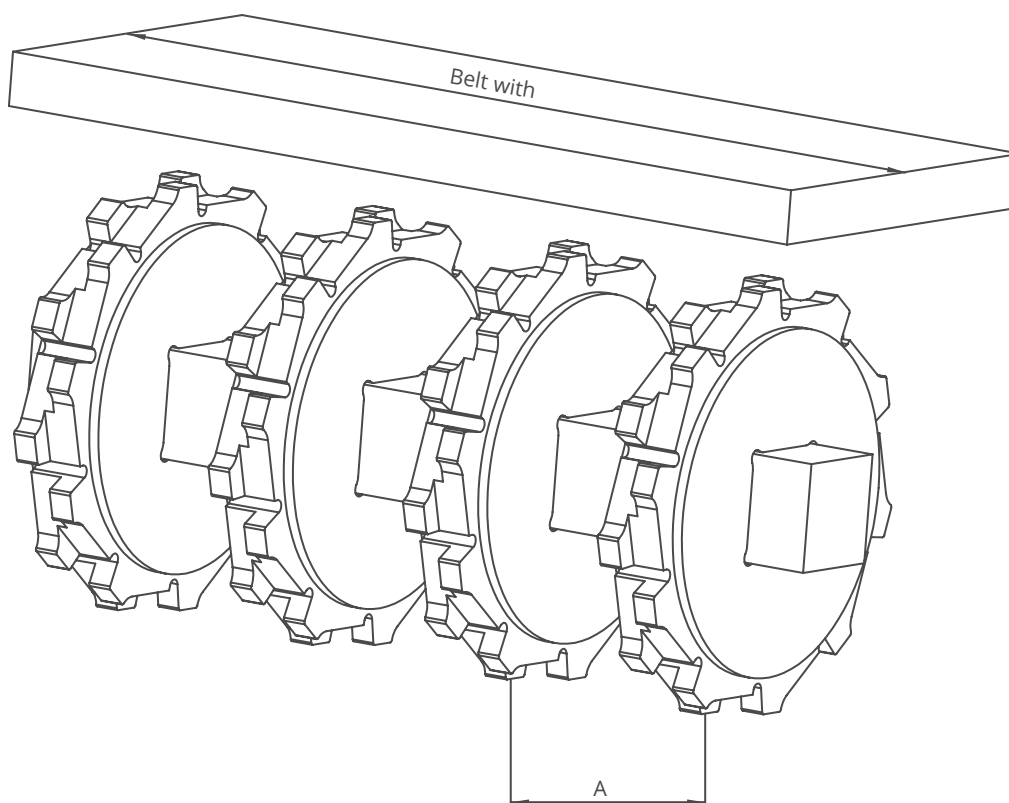

EC508T R Serie / Sprockets Arrangement

| Standard Belt Width | | Number of sprockets per shaft | | A (mm/inch) | |
|---------------------|------|-------------------------------|--------------|-------------|---------|
| mm | inch | Drive Shaft | Return Shaft | Min. | Max. |
| 508,0 | 20.0 | 6 | 5 | 50/2 | 120/4.7 |
| 558,8 | 22.0 | 7 | 6 | 50/2 | 120/4.7 |
| 609,6 | 24.0 | 8 | 7 | 50/2 | 120/4.7 |
| 660,4 | 26.0 | 8 | 7 | 50/2 | 120/4.7 |
| 711,2 | 28.0 | 9 | 8 | 50/2 | 120/4.7 |
| 762,0 | 30.0 | 10 | 9 | 50/2 | 120/4.7 |
| 812,8 | 32.0 | 10 | 9 | 50/2 | 120/4.7 |
| 863,6 | 34.0 | 11 | 10 | 50/2 | 120/4.7 |
| 914,4 | 36.0 | 11 | 10 | 50/2 | 120/4.7 |
| 965,2 | 38.0 | 12 | 11 | 50/2 | 120/4.7 |
| 1016,0 | 40.0 | 13 | 12 | 50/2 | 120/4.7 |
| 1066,8 | 42.0 | 13 | 12 | 50/2 | 120/4.7 |
| 1117,6 | 44.0 | 14 | 13 | 50/2 | 120/4.7 |
| 1168,4 | 46.0 | 15 | 14 | 50/2 | 120/4.7 |

Note: Number of sprockets depends on the belt load.

EC508T R Serie / Collapse Factors per width for EC508T R Serie

| | | | | | | | | | | | | | | | | | | | | |
|--------------------------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Nom. Belt Width (mm) | 355,6 | 406,4 | 457,2 | 508,0 | 558,8 | 609,6 | 660,4 | 711,2 | 762,0 | 812,8 | 863,6 | 914,4 | 965,2 | 1016,0 | 1066,8 | 1117,6 | 1168,4 | 1219,2 | 1270,0 | 1320,8 |
| Nom. Belt Width (inch) | 14.0 | 16.0 | 18.0 | 20.0 | 22.0 | 24.0 | 26.0 | 28.0 | 30.0 | 32.0 | 34.0 | 36.0 | 38.0 | 40.0 | 42.0 | 44.0 | 46.0 | 48.0 | 50.0 | 52.0 |
| Collapse Factor | 1,49 | 1,49 | 1,49 | 1,49 | 1,50 | 1,51 | 1,52 | 1,53 | 1,53 | 1,54 | 1,54 | 1,55 | 1,56 | 1,56 | 1,57 | 1,57 | 1,58 | 1,60 | 1,62 | 1,63 |
| Min. Inner Radius (mm) | 529,8 | 605,5 | 681,2 | 756,9 | 838,2 | 920,5 | 1003,8 | 1088,1 | 1165,9 | 1251,7 | 1329,9 | 1417,3 | 1505,7 | 1585,0 | 1674,9 | 1754,6 | 1846,1 | 1950,7 | 2057,4 | 2152,9 |
| Min. Inner Radius (inch) | 20.9 | 23.8 | 26.8 | 29.8 | 33.0 | 36.2 | 39.5 | 42.8 | 45.9 | 49.3 | 52.4 | 55.8 | 59.3 | 62.4 | 65.9 | 69.1 | 72.7 | 76.8 | 81.0 | 84.8 |

Standard range of belt width and collapse factor (Min. Inner radius = Collapse factor x Standard belt width)